

Garage door opener

**Model
LM1000A-2
LM1000AGB-2**




**Model
5580-2
5580GB-2**



**Model
LM800A-2
LM800AGB-2**



**Model
LM3800A**



All garage door openers (LM3800A partly) come with automatic-learn force sensing, easy to program electronic limits, rolling code technology, energy saving transformer, quick-connect wire terminals, logic board with diagnostics, 1-light*230V/40W with 2.5 minute adjustable light delay, antenna, door-in-door and flashing light connection.

Specify operator head and 30mm chain or belt steel C-rail separately.

Garage door opener LM1000A-2

Included:

- 24V DC motor
- Smooth, soft-start/soft-stop
- Chain or Belt drive
- Automatic close timer
- 24V DC power terminal
- Wireless Wallcontrol
- Rail to head quick connect
- C-rail low headroom bracket

5-Year Motor/2-Year Full warranty

TÜV-tested to meet EN12453
For doors up to 130kg / 13,5m²

Description:

- 1000N, 230-240V/50Hz, 190W, Tn=10Nm
- Reduction means: Gear 63:1
- Lifting capacity: Automatic 0-100kg
- Travel rate: approx. 160mm/s
- Shipping weight – head: 7.5kg
- Stand-by power consumption: 5.5W

Radio:

- 433.92MHz Smart superheterodyne receiver
- 64 Memory registers
- Two 4-channel mini remote control with rolling code

With 12-language EU instructions and Schukocord-set
With UK 3-pin fused cord-set (Model LM1000AGB-2)



Garage door opener LM800A-2

Included:

- 24V DC motor
- Smooth, soft-start/soft-stop
- Chain or Belt drive
- Automatic close timer
- 24V DC power terminal
- Multi-function control panel
- Rail to head quick connect
- C-rail low headroom bracket

4-Year Motor/2-Year Full warranty

TÜV-tested to meet EN12453
For doors up to 110kg / 13,5m²


Description:

- 800N, 230-240V/50Hz, 165W, Tn=8Nm
- Reduction means: Gear 63:1
- Lifting capacity: Automatic 0-80kg
- Travel rate: approx. 160mm/s
- Shipping weight – head: 7,5kg
- Stand-by power consumption: 5W

Radio:

- 433.92MHz Smart superheterodyne receiver
- 32 Memory registers
- Two 3-channel mini remote control with rolling code
- Multi-function control panel

With 12-language EU instructions and Schukocord-set
With UK 3-pin fused cord-set (Model LM800AGB-2)

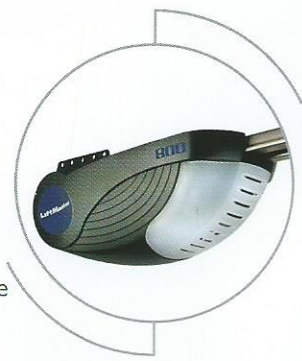

✓ Garage door opener 5580-2

Included:

Heavy-duty AC motor
Chain drive
Flip down light lens
Illuminated push button
C-rail low headroom bracket

2-Year Full Warranty

TÜV-tested to meet EN12453
For doors up to 110kg / 13,5m²

Description:

800N, 230-240V/50Hz, 400W, 2,5A
Reduction means: Gear 16:1
Lifting capacity: Automatic 0-80kg
Travel rate: approx. 133mm/s
Shipping weight – head: 12,2kg
Stand-by power consumption: 2,6W

Radio:

433.92MHz Smart superheterodyne receiver
8 Memory registers
Two 3-channel mini remote control with rolling code

With 12-language EU instructions and Schukocord-set
With UK 3-pin fused cord-set (Model 5580GB-2)



Garage door opener LM60A

Included:

24V DC motor
Smooth, soft-start/soft-stop
Chain drive
Illuminated push button
1 bulb 24V/21W

2-Year Full Warranty

TÜV-tested to meet EN12453
For doors up to 90kg / 10,7m²

Description:

600N, 230-240V/50Hz, 100W, Tn=5Nm
Reduction means: 63:1
Lifting capacity: Automatic 0-60kg
Travel rate: approx. 160mm/s
Shipping weight – head: 12,5kg
Stand-by power consumption: 4W

Radio:

433.92MHz Smart superheterodyne receiver
12 Memory registers
One 3-channel mini remote control with rolling code

With 17-language EU instructions and Euro-contact pin



Garage door opener LM3800A

Included:

24V shaft operator
Smooth, soft-start/soft-stop
Electronic control included
Clutch for 1" inch shafts
Slack rope switch with cable
Wall mounting bracket
Automatic close

2-Year Full Warranty

GS tested and tested to meet EN12453
For doors up to 130kg/13,5m²

Description:

10Nm (max. 40Nm), 230-240V/50Hz, 190W
Lifting capacity: Automatic
Travel rate: approx.: 24 & 36 rpm
Shipping weight – head: 13kg
Stand-by power consumption: 5W
Backup Battery possible

Radio:

433.92MHz Smart superheterodyne receiver
64 Memory registers
Two 3-channel mini remote control with rolling code

With multilingual EU instructions and Schukocord-set




Premium accessories included

4-channel mini remote control



LM1000A-2
RDO800

Wireless wallcontrol

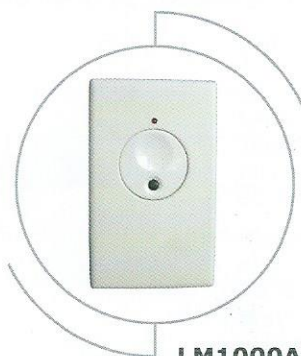


LM1000A-2
RDO800

3-channel mini remote control



LM800A-2
5580-2
LM3800A
RDO800

C-rail low headroom bracket

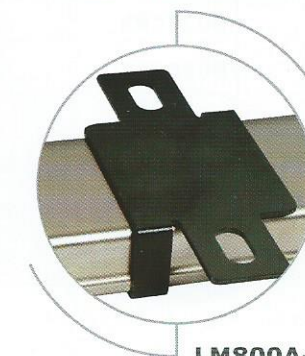

LM800A-2
LM1000A-2
5580-2